海博集团旗下企业 A Subsidiary of Highborn Group

硅橡胶

Silicone Rubber







邮箱 Email:evelyn@cnhighborn.com

电话 Tel：86-518-81060600/11/22/55

whatsapp/微信 wechat：86-13951255589

官网/Website： www.cnhighborn.com

地址：中国江苏省连云港市海州区朝阳东路 21 号东盛名都广场 A 座 9 楼

Address: 9F,Bldg.A Dongshengmingdu Plaza,No.21 Chaoyang East Road, Haizhou District,Lianyungang,Jiangsu,China

硅橡胶 Silicone rubber（硅胶）

A 定制开发 Custom Development

专业定制，满足个性需求。我们拥有强大的研发团队，可根据客户的特定工况要求，调配特殊材料。在拉力、回弹力等关键性能方面，我们有着深入研究与丰富经验。从参数调整到样品测试，我们不断优化，直至完全满足您的需求。

Professional customization to meet personalized needs. We have a strong R&D team that can formulate special materials according to customers' specific working conditions. We have in-depth research and extensive experience in key properties such as tensile strength and resilience. From parameter adjustment to sample testing, we keep optimizing until your requirements are fully met.

B 优质服务 Premium Service

售前：专业团队全程协助客户完成制图、改图，打样，确保产品尺寸、结构与性能精准契合定制化需求，提供个性化解决方案。

售后：客户在交货后发现任何不良品或瑕疵品，我们承诺迅速响应并无条件解决，直至客户完全满意为止，保障客户权益。

Pre-sales: A professional team assists customers throughout drawing, revision, and sample making to ensure product dimensions, structure and performance accurately match customized needs, providing personalized solutions.

After-sales: If customers find any defective or faulty products after delivery, we promise a rapid response and unconditional resolution until full satisfaction, safeguarding customer rights and interests.

C 品质保障 Quality Assurance

严抓品控，杜绝毛刺、飞边、孔位堵塞等瑕疵，采用二次元精密检测设备检测。特殊材料具备防火、耐高温、耐酸碱、高拉力等特性，历经市场重重考验，获得广泛认可和应用，长久耐用，安全可靠。

Strict quality control is implemented to eliminate burrs, flashes, hole blockages and other defects.Inspected by precision 2D measuring equipment.Special materials feature fire resistance, high temperature resistance, acid and alkali resistance, and high tensile strength. Tested repeatedly in the market, our products are widely recognized and applied, with long service life, safety and reliability.









D 出货迅速 Fast Delivery

常规产品 3 天即可出样，样品确认后当天即安排量产模具，模具制作工期 5-10 天，这种灵活高效的生产模式，能够满足各类客户的紧急需求，让您无后顾之忧。

Samples of standard products are ready in 3 days. Mass production molds are arranged on the same day after sample confirmation, with a mold lead time of 5–10 days. This flexible and efficient production mode meets urgent demands of various customers, giving you complete peace of mind.

E 环保安全材料 Eco-friendly & Safe Materials

根据客户需求，确保产品符合环保标准，选用食品级硅胶材料，兼具安全与环保特性，为客户打造高品质、可信赖的定制化产品。

In accordance with customer requirements, we ensure products comply with environmental standards and use food-grade silicone materials that are safe and eco-friendly, delivering high-quality and reliable customized product.

产品展示 Product Display

3C 产品系列 3C Product Series


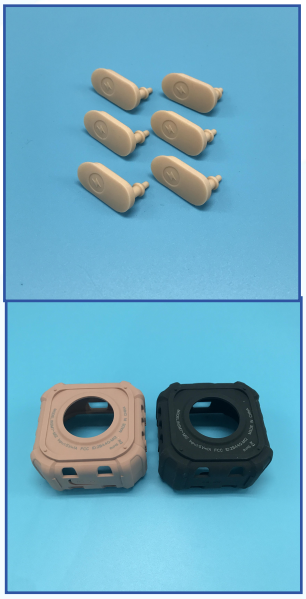

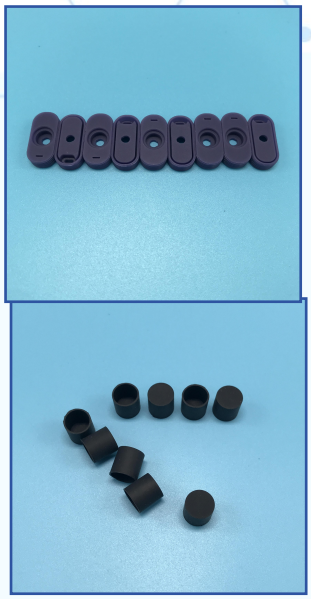

密封系列 Sealing Series






宠物系列 Pet Series






日用系列 Daily Use Series






Technical Data Sheet

参数项 Item	指标 Index
常规产品耐温 Conventional product temperature resistance	230 - 300℃
工作温度建议 Suggested working temperature	-40 - 200℃
材料温度范围（食品级） Material temperature range (food grade)	-40 - 230℃
材料温度范围（工业级） Material temperature range (industrial grade)	-40 - 250℃
邵氏硬度 Shore hardness	20 - 90 度 20 - 90 Shore
原材料认证 Raw material certification	ROHS
使用寿命(食品级硅胶) Service life (food grade silicone rubber)	三年到五年 3-5 years
使用寿命(工业硅胶) Service life (industrial silicone rubber)	2 年 2 years
材质等级 Material Grade	食品级硅胶 Food Grade Silicone Rubber
气味 Odor	无气味 Odorless
毒性 Toxicity	无毒 Non-toxic
耐化学性 Chemical resistance	耐高温，耐酸碱 High temperature resistance; Acid and alkali resistance